


ER-Li-Charge 12V 10A

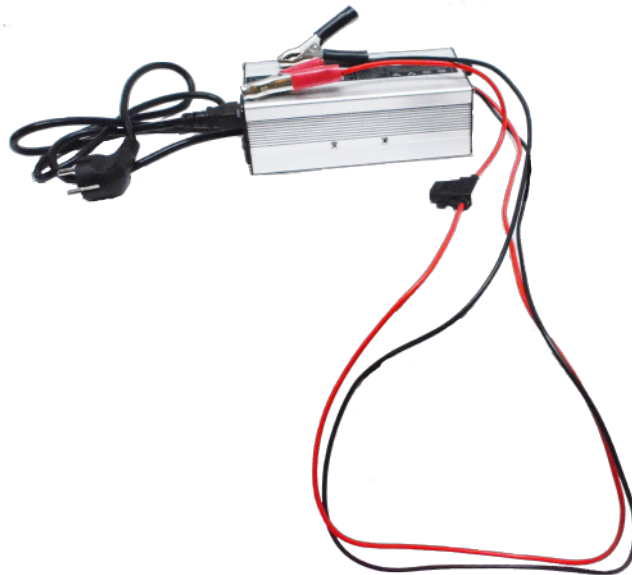

Input voltage Output voltage	12 VDC
Max current	10A
5-step charge curve	Boost, absorption, floating, refresh and reboost
Efficiency	>90%
Ripple	<1%
Operating temperature	-10° à +60°C without derating
Storage temperature	from -20° à to +70°C
Protection	IP22
Dimensions	236 x 180 x96 cm
Weight	2.2 kg

Electric fan controlled in temperature and/or current

- Output

- * integrated anti-return device to avoid battery discharge
- * automatic current limitation

- Input and output

- * against polarity reversal and short-circuit by removable fuses
- Against abnormal overheating by cutting off the charger (automatic restart)
- PCB : water-repellent varnish (marine environment)